




OTSUKA規格

ダウエルピン プレス型用 ネジなし

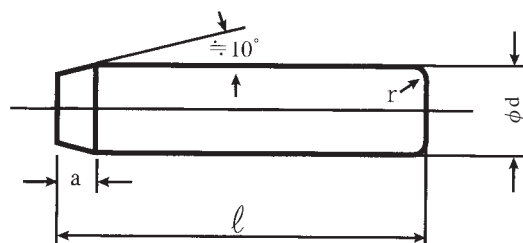

単位 mm

d	呼 び 径	3	4	5	6	8	10	12	13	16	20	
	許 容 差 Aタイプ	+0.010 +0.005										
	許 容 差 Bタイプ	+0.005 0										
	許 容 差 Cタイプ	+0 −0.005										
	表 面 粗 さ	0.8a										
r	約	0.4	1					1.5				
a	約	1.5				2.9						
ℓ	長 さ	8										
		10	10	10								
		15	15	15	15							
		16	16	16	16							
		20	20	20	20	20	20					
		25	25	25	25	25	25					
		30	30	30	30	30	30	30	30			
		35	35	35	35	35	35	35	35			
		40	40	40	40	40	40	40	40	40		
		45	45	45	45	45	45	45	45	45		
		50	50	50	50	50	50	50	50	50	50	
			55	55	55	55	55	55	55	55	55	
			60	60	60	60	60	60	60	60	60	
				65	65	65	65	65	65	65	65	
				70	70	70	70	70	70	70	70	
					80	80	80	80	80	80	80	
						90	90	90	90	90	90	
						100	100	100	100	100	100	
								110	110	110	110	
								125	125	125	125	
										140	140	

材 質 SCM445F
硬 さ HRC58~62

ご注文の際は、上記許容差によって、A・B・Cタイプに区別している為、
DP-A、DP-B、DP-Cを指定ください。(例 DP-A 6×30 数量)