




OTSUKA規格

外ネジ付テーパピン JIS 1 級精度

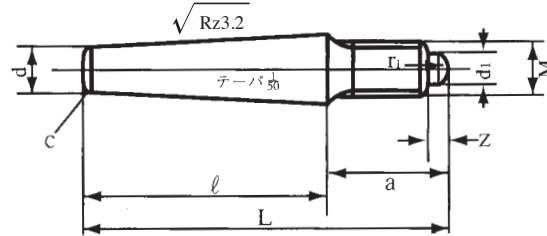

単位 mm

d	呼び径	4	5	6	8	10	12	13	16	20
M	ネジ径	M4	M5	M6	M8	M10	M12	M12	M16	M16
a	Max	15	15	20	20	25	30	30	35	35
d1	Max	2.5	3.5	4.5	6	7	9	9	12	12
r1	≒	3	3	3	5	6	8	8	12	12
C	≒	0.3	0.3	0.4	0.4	0.5	0.6	0.6	0.8	0.8
Z	Max	2	2	2	2.5	3	3.5	3.5	4.5	4.5
テーパ部長さ (ℓ)										
呼び長さ L 全長	30	15	15							
	35	20	20	15						
	40	25	25	20	20					
	45	30	30	25	25					
	50	35	35	30	30	25				
	55	40	40	35	35	30				
	60	45	45	40	40	35	30	30		
	65	50	50	45	45	40	35	35		
	70	55	55	50	50	45	40	40		
	75		60	55	55	50	45	45	40	
	80		65	60	60	55	50	50	45	
	85			65	65	60	55	55	50	50
	90			70	70	65	60	60	55	55
	95				75	70	65	65	60	60
	100				80	75	70	70	65	65
	105				85	80	75	75	70	70
	110				90	85	80	80	75	75
115				95	90	85	85	80	80	
120				100	95	90	90	85	85	
125					100	95	95	90	90	
130						100	100	95	95	
135								100	100	
140								105	105	
145								110	110	
160								125	125	

- 許容差 許容差は、JIS B 1352-1988 (附属書) のテーパピン通り。
- ネジ精度 ネジ精度は、JIS (並目ねじ) の2級精度。
- 材質 S45CF 熱処理 硬さHRC30~37
SUS303

※ご用命の際は、呼び径(d)×呼び長さ(L)でお願いいたします。

その他の材質・形状の外ネジ付テーパピンも製作いたします。